

The following information is a guide for the requirements to meet when racing your Street Bike.

## Clothing/Safety Requirements

- ONE PIECE Full Face helmet with visor
  - AS/NZS:1698, ECE 22.05
  - SA2010, SA2015
  - M2010, M2015
  - **Open Face or Skull type helmets NOT permitted**

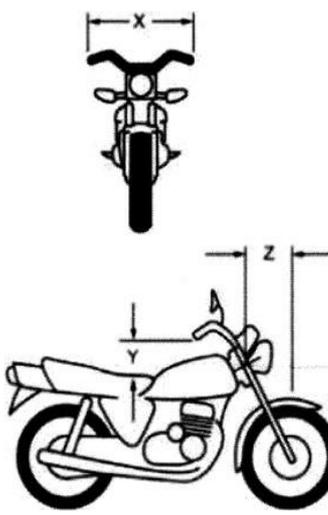

- Riding Jacket – Leather/Kevlar/Motocross
- Long Pants (No Holes)
- Boots above the ankles
- Leather riding gloves with knuckle protection
- No Trikes
- No Club colours to be worn

## Bike requirements

- Good working front and rear brakes
- Self-returning throttle grip
- Chain/Belt guard - OEM / After Market
- Swing arms must remain OEM length (unless ANDRA licensed)
- Full exhaust and muffler must be fitted
- No Wheelie Bars Permitted

- Good tyres.
- Operating rear tail light
- "RE" License up to 660cc. "R" license over 660cc
- "R-N" License Moped/Scooter up to 50cc
- No fluid leaks
- Front fork rake must not exceed 550mm (see below)

## Handlebars

Motorcycles manufactured after 30 June 1988	Motorcycles manufactured before 1 July 1988
 <p>Dimension (X) not less than 500mm and not more than 1100mm.</p> <p>Dimension (Y) not greater than 380mm.</p> <p>Dimension (Z) not greater than 550mm.</p> <p>The handlebar must have the same shape and be of the same length on either side of the front wheel and steering head assembly. Handlebar dimensions must be limited to ensure that the rider always has adequate control over the motorcycle.</p>	<p>The distance between the extreme ends of the handlebar (V) must not be less than 550mm.</p> <p>The highest point on the handlebar must not be more than 380mm (W) above the top of the yoke.</p> <p>Where the highest point of the handlebar is more than 205mm vertically above the top of the steering yoke (W), the distance between the extreme ends of the handlebar (V) must not be less than 660mm.</p>  <p>Dimension (V) must not be less than 500mm and not more than 1100mm.</p> <p>Dimension (W) must not be greater than 380mm.</p> <p>Note: If (W) is greater than 205mm then (V) must not be less than 660mm.</p>

The following handlebar measurements have been approved for racing under ADR for all Chopper style frames with Low Seats. **Max LENGTH from top of tree to the apex of the bars = 320mm overall.** This includes combination riser and handlebar and one-piece and two-piece T-Bars. The rider's hands must remain below the horizontal plane of the shoulder regardless of bar length and riser height while in the seated riding position.



## Nitrous Oxide

Must have an arming switch and blue light, a full throttle switch all running through the ignition switch. Non-syphon type bottles must be mounted in an inverted. Syphon type bottle must remain upright above 45 degrees from horizontal with the syphon tube facing downward.